

Geotechnical behaviour of the carbonate sand-granulated tire mixture

Nader Shariatmadari^{1*}, Mohsen Norouzi¹, Armin Saeedi Javadi¹, & Mehrdad Alizadeh¹

¹School of Civil Engineering, Iran University of Science and Technology (IUST), Narmak, 16844, Tehran, Iran

*[E-mail: Shariatmadari@iust.ac.ir]

Received 25 April 2018; revised 04 September 2018

Carbonate sand-tire mixture is used in this research as a soil improvement method to address the environmental problems regarding the accumulation of scrap tires in coastal areas. The stress-strain behaviour, internal friction angle, and the particle breakage of the carbonate sand-tire mixture are studied, and the results are compared to that of pure carbonate sand. The results revealed that the addition of the granulated tires to the carbonate sand changed its behaviour. The addition of granulated tires resulted in a decrease of both the friction angle and the quantity of particle breakage.

[Keywords: Breakage index; Carbonate sand; Direct shear test; Sand-tire mixture; Scrap tire]

Introduction

The increase of scrap tires results in the increase of their accumulation in the environment, which leads to environmental disasters¹. It is estimated that about 90 % of annually generated scrap tires recovered, in the USA and Europe². However, 2.1 million tons of scrap tires in the USA and 5.5 million tons in Europe remained in stockpiles at the end of 2007 and 2010, respectively².

The scrap tires can be recycled and reused in various fields, one of which is civil engineering applications. These applications include sand-tire mixtures^{3,4} as a soil embankment for road construction^{1,5}, retaining wall backfills⁶, drainage material in the cover system of landfills⁷, and utilization of tire shreds in construction materials such as concrete⁸. In addition, one of the most recent applications of tire shreds is its usage as a sand tire mixture for seismic isolation of structures^{9,10}. Seismic isolation is of high importance in many regions, primarily onshore and offshore areas. In these regions, the structures are exposed to dynamic loadings such as wave, current, and earthquake loadings in their life cycle¹¹, which shows the importance of seismic isolation for them. A large portion of the soil in onshore and offshore areas, especially in the Persian Gulf and coasts of Australia, is carbonate sand^{12,13}. This type of soil has a considerable amount of calcium carbonate and an inherent breakable characteristic; also, it is composed of various-shaped grains with many voids on its surface, all of which lead to different behaviour in comparison with other types of soil such as the most common silica sand¹³⁻¹⁵. Carbonate

deposits present a different geotechnical behaviour under cyclic and monotonic loading in comparison with siliceous deposits, such as tending to contractive behaviour and having higher friction angles¹⁶⁻¹⁸. Furthermore, owing to the problematic nature of this soil¹⁹, it seems critical to investigate different types of soil improvement methods in carbonate sands, like the aforementioned sand-tire mixture.

Qeshm Island on the north coast of the Persian Gulf is one of the regions encountered with some problems relating to carbonate sand. One of the most recent environmental challenges of this island, because of its transportation characteristics, is the accumulation of scrap tires. Besides that, the increasing number of civil engineering projects in this developing region arises the idea of using the mixture of the tire-carbonate sand mixture as a soil improvement method. This paper aims to investigate the mechanical properties of the tire-carbonate sand mixture, such as stress-strain behaviour, friction angle, and particle breakage, and compare them with the mechanical properties of pure carbonate sand.

Materials and Methods

The carbonate sand utilized in this research was obtained from Qeshm Island at the Persian Gulf (Fig. 1). The CaCO₃ content of the soil was about 62 %, which is higher than the CaCO₃ content of many of the carbonate sands at other regions of the Persian Gulf, such as Bushehr Port and Hormoz Island²⁰. The scanning electron microscopy images (SEM) of Qeshm carbonate sand shows that it has

plate-shaped grains with sharp corners as well as some spiral-shaped grains (Fig. 2 A & B).

The tires used in this research were industrial granulated tire (rubber) with the size ranging from 2 to 3.35 millimeters (Fig. 2 C). Fig. 3 illustrates the particle size distribution of the Qeshm carbonate sand (QCS) and granulated tire (GT). Physical properties of QCS and GT, also, are showed in Table 1.

The mixtures of granulated tire-carbonate sand (GtCs) were prepared at various GT contents and then their minimum and maximum dry unit weight calculated according to the ASTM D4254 (2016b), and ASTM D4253 (2016a) respectively^{21,22}. The proportions of GT by volume in GtCs mixture were 0 %, 10 %, 20 % and 30 %. Given the maximum and minimum dry densities and the proportion of the GT in the GtCs mixture, the samples

were prepared by dry pluviation method at two different relative densities of 30 % (loose) and 70 % (relatively dense). The strain control direct shear tests were conducted according to the ASTM D3080 (1994) at overburden pressures of 100, 200, and 400 kPa²³.

Table 1 — material properties of carbonate sand and granulated tire

Material	G_s	D_{50} (mm)	C_c	C_u	e_{max}	e_{min}
Carbonate sand	2.60	0.8	2.89	7.65	0.948	0.604
Granulated tire	1.11	2.6	-	-	5.79	4.29



Fig. 1 — Location of Qeshm Island in the Persian Gulf



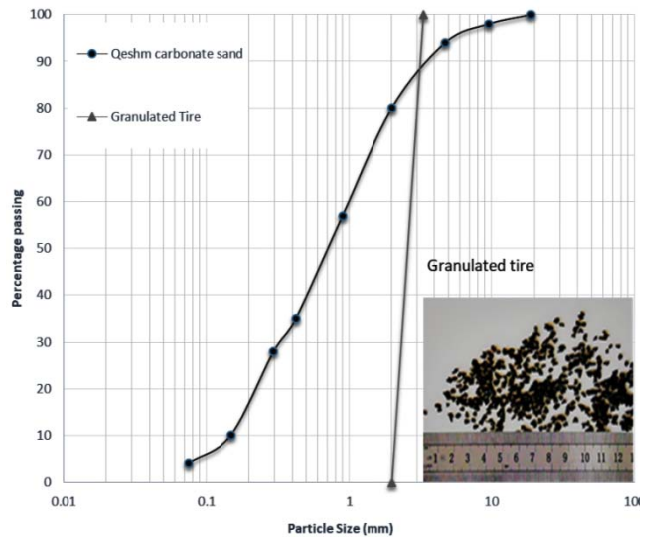



Fig. 3 — Particle size distribution of Qeshm carbonate sand and granulated tires

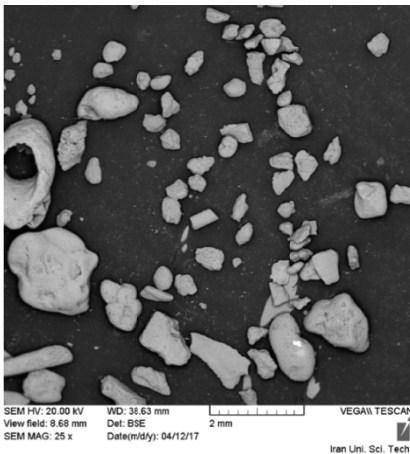

A)

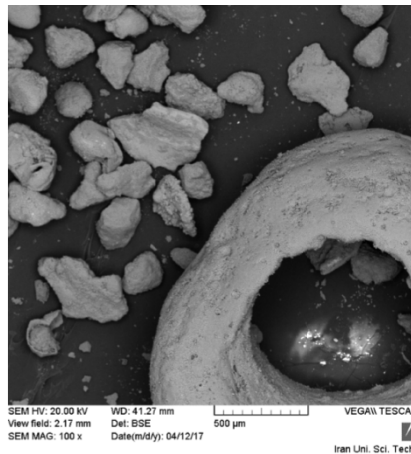

B)

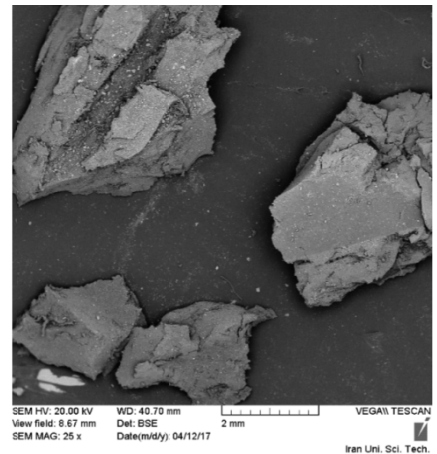

C)

Fig. 2 — SEM images of Qeshm carbonate sand (A & B) and granulated tire (C)

Results and discussion

Stress-strain behaviour

The stress-strain behaviour of the GtCs mixture with various proportions of GT at the normal stress of 100 kPa in loose and relatively dense states is presented in Fig. 4. As can be seen, the increase in the GT proportion resulted in the decrease of peak shear strength. In addition, the strain at which the maximum shear strength is reached, increases with increasing the GT content in both loose and relatively dense states. As the dilation of the GtCs mixture decreases by the addition of GT, it needs to reach higher strain to reach its peak shear strength. The stress-strain behaviour of the samples at the normal stress of 400 kPa in both loose and dense states is presented in Fig. 5. As shown, the GtCs samples with various contents of GT had a ductile behaviour with no peak shear strength in both loose and relatively dense states.

It can be inferred from Figures 4 and 5 that the effect of GT addition is higher in relatively dense samples. In other words, by adding the GT, the shear strength decreased by 5-10 % in the loose state;

however, it decreased by 10-20 % in the relatively dense state. It is evident that the void ratio in the relatively dense specimens is lower, and therefore the grains' interaction is higher in them as well as when the GTs are added to the sample. So, the higher interactions resulted in the higher effect of GT addition and the decrease of shear strength.

Internal friction angle

One of the most important parameters in the design of geotechnical structures, especially in cohesionless soils, is the internal friction angle. In this regard, the internal friction angle calculated using the following equation:

$$\varphi = \arctan \left(\frac{\tau_{\max}}{\sigma_n} \right) \tag{Eq. (1)}$$

where φ is the internal friction angle, σ_n is the normal stress, and τ_{\max} is the maximum shear stress.

The friction angles of the GtCs mixtures at various proportions of GT in both loose and relatively dense states are presented in Figures 6 and 7. Generally, the addition of the GT resulted in a decrease of the friction angle. This decrease is lower than 10 %, and it is also lower for the loose samples than dense

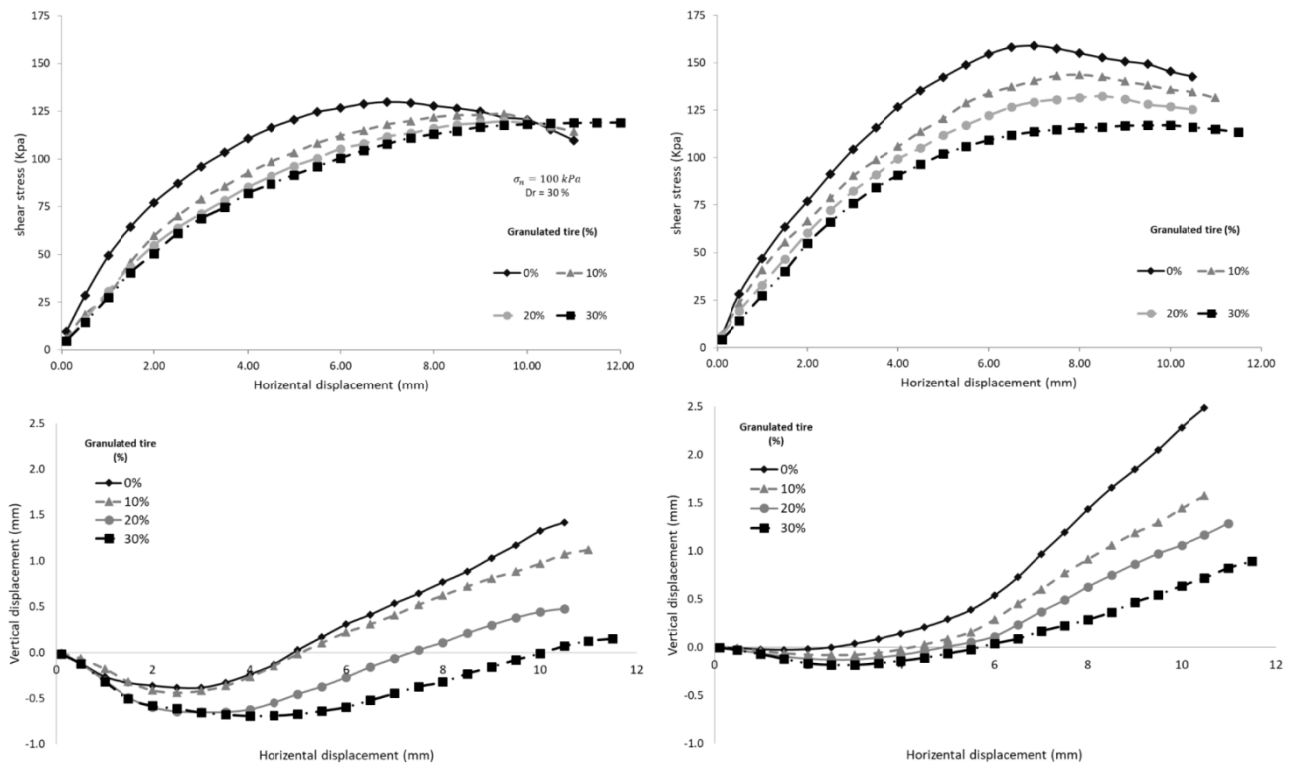


Fig. 4 — Stress-strain and volumetric behaviour of the carbonate sand-tire mixture at relatively dense and loose states and normal stress of 100 kPa

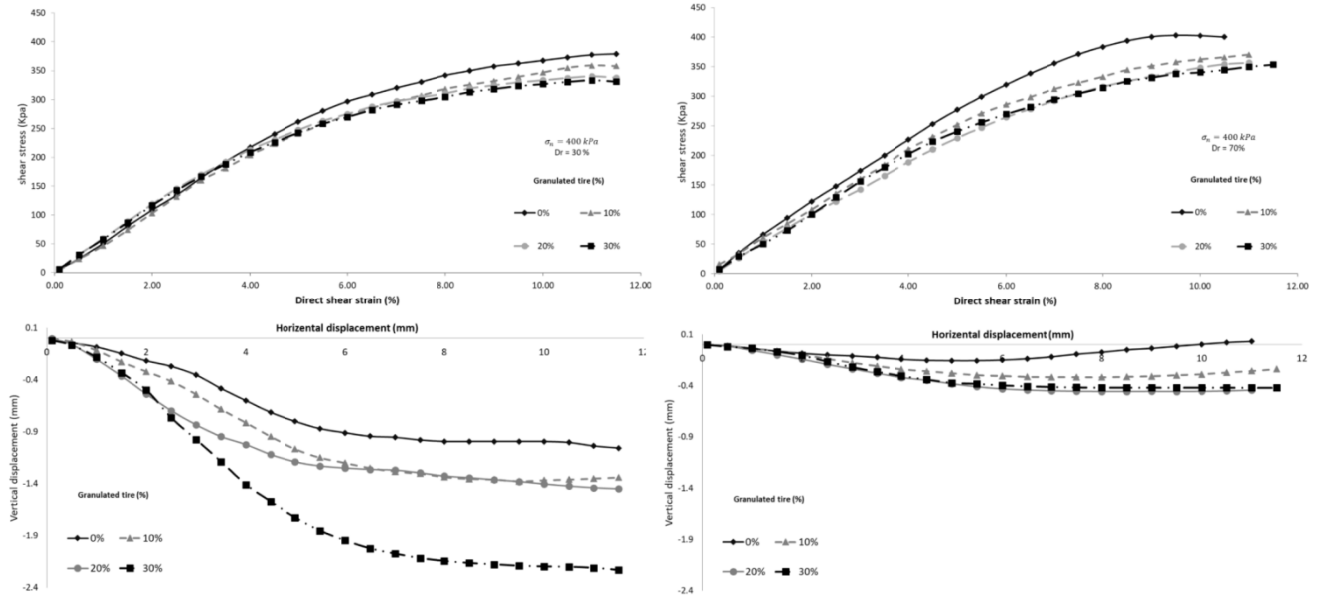


Fig. 5 — Stress-strain and volumetric behaviour of the carbonate sand-tire mixture at relatively dense and loose states and normal stress of 400 kPa

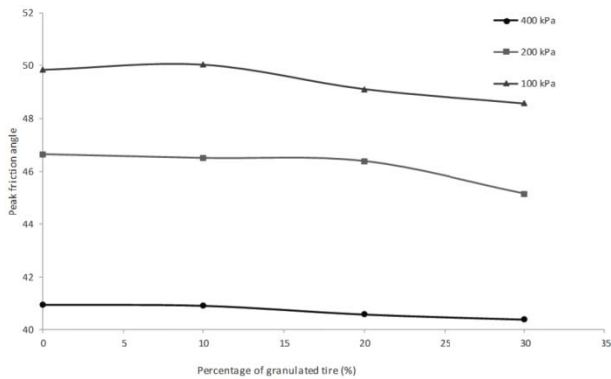


Fig. 6 — Effect of addition of granulated tire to the carbonate sand on friction angle in a loose state

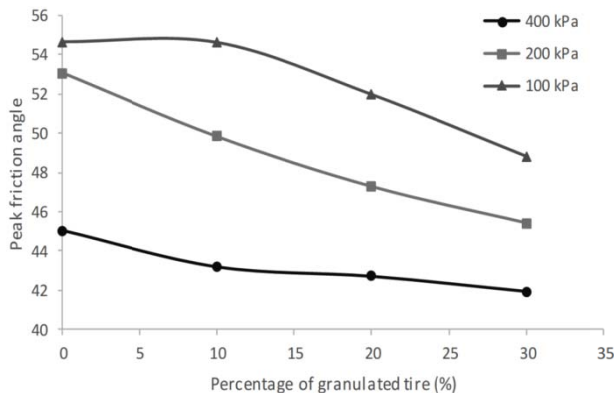


Fig. 7 — Effect of addition of granulated tire to the carbonate sand on friction angle in a relatively dense state

samples. Furthermore, the increase of the overburden pressure resulted in the reduction of the effect of GT addition. This phenomenon can be attributed to the elastic behaviour of the granulated tires and their position among the soil particles. In other words, the increase of the overburden stress resulted in the higher interaction of the soil particles, and therefore its lower variation in the friction angle in comparison with pure carbonate sand.

Particle Breakage index

The unique nature and shape of the carbonate sands lead to specific features, one of which is particle breakage under working loads^{14,19,24}. This feature has tremendous effects on the mechanical behaviour of carbonate sands, such as the decrease of dilation²⁵ and the increase of the Mohr-Coulomb shear envelope curvature²⁰. The Hardin method²⁶, which is based on the overall grain size distribution, was utilized to investigate the particle breakage. The following equation was used toward that end:

$$B_r = \frac{B_T}{B_p} \tag{Eq. (2)}$$

where B_r is the breakage index, B_T is the area restricted between the initial and the final grain size distribution curves, and B_p is the area between the initial grain size distribution curve and the line perpendicular to the horizontal axis passing the 0.075 mm (Fig. 8). The variation of the breakage

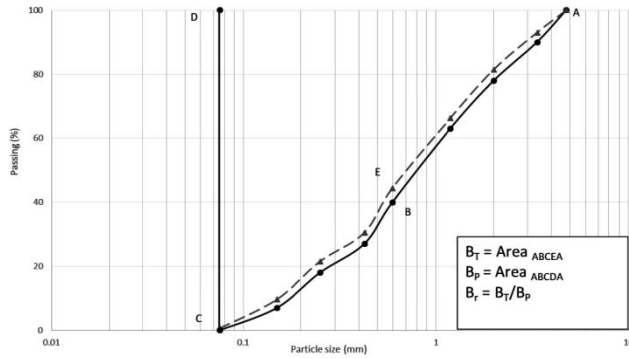


Fig. 8 — Definition of the particle breakage on the Hardin method²⁶

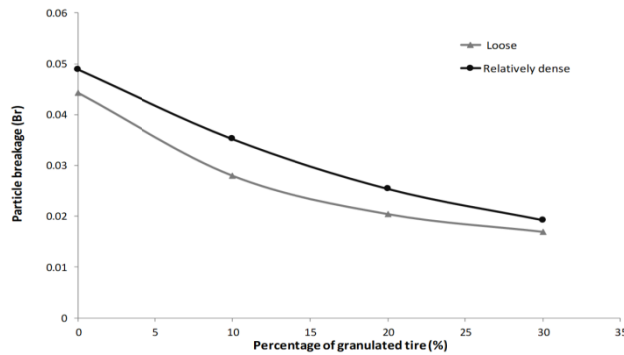


Fig. 9 — Tire addition effect on the particle breakage of the carbonate sand at the normal stress of 400 kPa

index at different GT contents is presented in Fig. 9. It can be inferred that increasing of the GT content in the mixture leads to the decrease of the breakage index in both loose and relatively dense states. It seems that the positioning of the tires among the soil particles leads to the reduction of the stress concentration at the grain edges, and therefore decrease of the particle breakage. In addition, as can be seen, the breakage index is higher for the relatively dense specimens. This result is in accordance with the results of the Shahnazari and Rezvani (2013)²⁰.

The particle breakage at the various overburden pressures is presented in Figures 10 and 11 for both loose and relatively dense states. As shown, the addition of the GT to the mixture reduced the particle breakage and maintained it at the relatively same quantity at different overburden pressures. This mechanism can be explained by two points. First, the major amount of particle breakage in the direct shear test occurs at the shear surface. Second, the addition of the GT to the carbonate sand can reduce the stress concentration at the grain edges. In other words, the addition of the GT compensates for the increase of the overburden stress, especially in the shear surface.

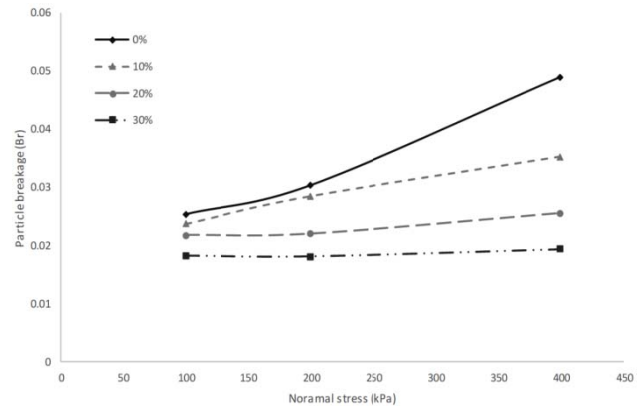


Fig. 10 — Tire addition effect on breakage of the carbonate sand at different normal stresses in a relatively dense state

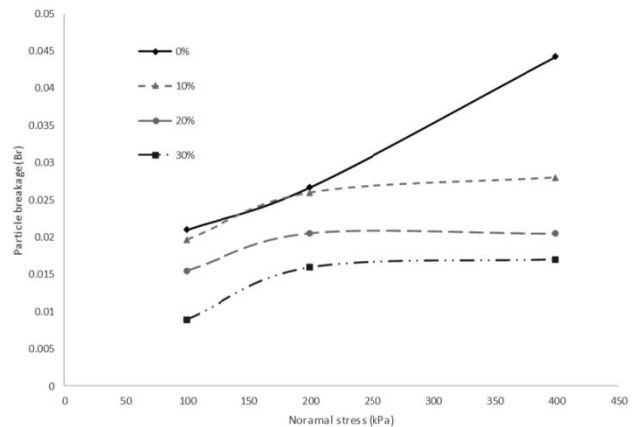


Fig. 11 — Tire addition effect on breakage of the carbonate sand at different normal stresses in a loose state

Comparison of the results with the mixture of tire crumbs and silica sand

Studies conducted on the mixture of silica sand and tire crumbs concluded that the addition of tire crumbs resulted in the entirely different geotechnical behaviour in comparison with the geotechnical behaviour of silica sand solely, and this behaviour is dependent on the size of the tire crumbs and soil particles²⁷⁻³⁰. One of the studies with the relatively similar properties of the tire crumbs is the one conducted by Neaz Sheikh *et al.*²⁸. The result of that research revealed that the addition of the tire crumbs to the silica sand resulted in the reduction of the shear strength and internal friction angle, which is similar to the results obtained in this research. Furthermore, Neaz Sheikh *et al.*² concluded that the addition of tire crumbs increased the ductility of the silica sand which is, also observed in the GtCs mixture. One of the apparent differences between silica and carbonate sands is the particle breakage at working loads which occurs to carbonate sands²⁰. The particle breakage is

investigated herein, and its reduction in the GtCs mixture was observed.

Conclusion

The accumulation of tire crumbs in nature causes many environmental problems. To resolve these problems, various applications are proposed for tire crumbs, one of which is a geotechnical application as a tire-sand mixture. In this research, the mechanical properties of the granulated tire-carbonate sand mixture are investigated. The results revealed that using the granulated tires with a similar size as the carbonate sand particles in the mixture of tire-sand leads to a decrease of the shear strength. Furthermore, the addition of the granulated tires resulted in the disappearance of the peak shear strength, and hardening behaviour of the mixture. In other words, the mixture revealed more ductile behaviour. The importance of this behaviour is evident as the carbonate sand is indigenous to many onshore and offshore areas, and the structures in these areas are under the dynamic load in their life cycle. The mixture of granulated tire-carbonate sand can be used as seismic isolation owing to its ductility. Moreover, the investigation of the mechanical properties of the mixture revealed that the addition of the granulated tire to the carbonate sand reduced both the internal friction angle and the particle breakage of carbonate sands.

Reference

- Bosscher, P. J., Edil, T. B., & Kuraoka, S., Design of Highway Embankments Using Tire Chips, *J. Geotech. Geoenviron. Eng.*, 123 (1997) 295–304.
- Neaz Sheikh, M., Mashiri, M.S., Vinod, J.S., & Tsang, H.H., Shear and Compressibility Behaviour of Sand-Tire Crumb Mixtures, *J. Mater. Civ. Eng.*, 25 (2013) 1366–1374.
- Zornberg, J.G., Cabral, A.R., & Viratjandr, C., Behaviour of tire shred-sand mixtures, *Can. Geotech. J.*, 41 (2004) 227–241.
- Ehsani, M., Shariatmadari, N., & Mirhosseini, S.M., Shear modulus and damping ratio of sand-granulated rubber mixtures, *J. Cent. South. Univ.*, 22 (2015) 3159–3167.
- Meles, D., Bayat, A., Hussien Shafiee, M., Nassiri, S., & Gul, M., Investigation of tire derived aggregate as a fill material for highway embankment, *Int. J. Geotech. Eng.*, 8 (2014) 182–190.
- Dammala, P.K., Sodom, B.R., & Adapa, M.K., Experimental Investigation of Applicability of Sand Tire Chip Mixtures as Retaining Wall Backfill, In *IFCEE 2015*, (American Society of Civil Engineers, Reston, VA), 2015, 1420–1429.
- Reddy, K.R., Stark, T.D., & Marella, A., Beneficial Use of Shredded Tires as Drainage Material in Cover Systems for Abandoned Landfills, *Pract Period Hazard., Toxic, Radioact Waste Manag.*, 14 (2010) 47–60.
- Siddique, R., Utilization of waste materials and by-products in producing controlled low-strength materials, *Resour. Conserv. Recycl.*, 54 (2009) 1–8.
- Tsang, H.H., Lo, S.H., Xu, X., & Neaz Sheikh, M., Seismic isolation for low-to-medium-rise buildings using granulated rubber-soil mixtures: numerical study, *Earthq. Eng. Struct. Dyn.*, 41 (2012) 2009–2024.
- Kaneko, T., Orense, R.P., Hyodo, M., & Yoshimoto, N., Seismic Response Characteristics of Saturated Sand Deposits Mixed with Tire Chips, *J. Geotech. Geoenviron. Eng.*, 139 (2013) 633–643.
- Mostafa, Y.E. & El Naggar, M.H., Response of fixed offshore platforms to wave and current loading including soil-structure interaction, *Soil. Dyn. Earthq. Eng.*, 24 (2004) 357–368.
- Nisha, V. & Achyuthan, H., Geochemical evaluation of sea surface sediments along the continental shelf, south east coast of India, *Indian J. Mar. Sci.*, 43 (2014) 241–251.
- Shahnazari, H., Jafarian, Y., Tutunchian, M.A., & Rezvani, R., Undrained cyclic and monotonic behaviour of Hormuz calcareous sand using hollow cylinder simple shear tests, *Int. J. Civ. Eng.*, 14 (2016) 209–219.
- Hyodo, M., Aramaki, N., Itoh, M., & Hyde, A.F.L., Cyclic strength and deformation of crushable carbonate sand, *Soil. Dyn. Earthq. Eng.*, 15 (1996) 331–336.
- Shahnazari, H., Maghoul, M., Alizadeh, M., & Saeedi Javadi, A., Effect of anisotropy on shear behaviour of Hormoz carbonate sand, *Int. J. Geotech. Eng.*, 12 (2018) 484–490.
- Airey, D.W. & Fahey, M., Cyclic response of calcareous soil from the North-West Shelf of Australia, *Geotechnique*, 41 (1991) 101–121.
- Shahnazari, H., Rezvani, R., & Tutunchian, M.A., Experimental study on the phase transformation point of crushable and noncrushable soils, *Mar. Geores. Geotechnol.*, 35 (2017) 176–185.
- Shahnazari, H., Salehzadeh, H., Rezvani, R., & Dehnavi, Y., The effect of shape and stiffness of originally different marine soil grains on their contractive and dilative behaviour, *KSCCE J. Civ. Eng.*, 18 (2014) 975–983.
- Wang, X-Z., Jiao, Y-Y., Wang, R., Hu, M-J., Meng, Q-S., et al., Engineering characteristics of the calcareous sand in Nansha Islands, South China Sea, *Eng. Geol.*, 120 (2011) 40–47.
- Shahnazari H. & Rezvani R., Effective parameters for the particle breakage of calcareous sands: An experimental study, *Eng. Geol.*, 159 (2013) 98–105.
- ASTM International., ASTM D4254-16: Standard Test Methods for Minimum Index Density and Unit Weight of Soils and Calculation of Relative Density, (2016) ASTM International, West Conshohocken, PA, USA.
- ASTM International., ASTM D4253-16: Standard Test Methods for Maximum Index Density and Unit Weight of Soils Using a Vibratory Table, (2016) ASTM International, West Conshohocken, PA, USA.
- ASTM International., ASTM D3080-90: Standard test method for direct shear test of soils under consolidated drained conditions, *Annu B ASTM Stand.*, 4 (1994) 290–295.
- Van Impe, W.F., Some Fundamental Issues and Examples of Geo-Engineering Challenges Caused by Crushable Sands, *Indian Geotech. J.*, 46 (2016) 335–353.

- 25 Dehnavi, Y., Shahnazari, H., Salehzadeh, H., & Rezvani, R., Compressibility and undrained behaviour of Hormuz calcareous sand, *Electron. J. Geotech. Eng.*, 15 (2010) 1684–1702.
- 26 Hardin, B.O., Crushing of soil particles, *J. Geotech. Eng.*, 111 (1985) 1177–1192.
- 27 Mashiri, M.S., Vinod, J.S., Sheikh, M.N., & Tsang, H-H., Shear strength and dilatancy behaviour of sand–tyre chip mixtures, *Soils Found*, 55 (2015) 517–528.
- 28 Neaz Sheikh, M., Mashiri, M.S., Vinod, J.S., & Tsang, H-H., Shear and Compressibility Behaviour of Sand–Tire Crumb Mixtures, *J. Mater. Civ. Eng.*, 25 (2013) 1366–1374.
- 29 Cabalar, A.F., Direct shear tests on waste tires–sand mixtures, *Geotech. Geol. Eng.*, 29 (2011) 411–418.
- 30 Ghazavi, M. & Sakhi, M.A., Influence of Optimized Tire Shreds on Shear Strength Parameters of Sand, *Int. J. Geomech.*, 5 (2005) 58–65.