



## Effect of Groove Location on Pressure Profile of Twin Axial Groove Journal Bearing

Vijay Kumar Dwivedi<sup>1</sup>, Pooja Pathak<sup>2</sup>, Kamal Sharma<sup>1</sup> and Manish Saraswat<sup>4\*</sup>

<sup>1</sup>Department of Mechanical Engineering, GLA University, Mathura, India 281 406

<sup>2</sup>Department of Mathematics, GLA University, Mathura, India 281 406

<sup>3</sup>Department of Mechanical Engineering, ABES Engineering College, Ghaziabad (UP) India 201 009

Received 17 August 2019; revised 21 February 2020; accepted 28 September 2020

The main aim of current work is to analyze the influence of groove location on the pressure profile of the hybrid journal bearing. The objective is to develop solution algorithm and computer program which will provide pressure profile developed in the space of clearance of bearing having a given value of Sommerfeld number. The solution algorithm shall also provide three dimensional pressure profiles of the bearing for different groove location. It was found that groove location with respect to the loading line strongly influences the parameters of performance because of the stronger groove interference in the pressurized hydrodynamic field. The comparison of circumferential pressure with angular location from +X-axis is shown for the ratio of length to diameter which comes out to be 0.5, the clearance ratio (C/R) is found to be 0.00294 while 1125 rpm is the speed. The groove axes optimal location lies between 60° to 90° ( $\alpha_1$  g = 0°) to the line of loading.

**Keywords:** Groove, Hybrid journal bearing, Pressure profile, Sommerfeld number, Super laminar flow

### NOMENCLATURE

$P_s$  Supply pressure

C/R Clearance ratio

$\bar{K}_\alpha, \bar{K}_\beta$  Non dimensionless turbulence

coefficients in X, Y direction

W Width of groove

$\lambda$  Aspect ratio (L/D)

$\alpha_g$  Location of groove

$\Omega$  Rotational velocity of journal

H Film thickness between clearance space

$S_n$  Sommerfeld number

$\dot{X}_j, \dot{Z}_j$  Journal centre velocity

a Length of groove

L Length of bearing

D Diameter of bearing

$\mu$  Lubricant Viscosity

### Introduction

Hybrid journal bearings are widely used in turbo-machinery subjected to high loads and high journal speeds. The lubricant is often supplied at a prescribed pressure from a supply hole at the inlet through one or two grooves. Groove location and their orientation have significant effect on pressure profile. These grooves are cut into the bearing's internal surface. The supply condition<sup>1</sup> of oil has a great influence on the pressure profile generated between the clearance spaces. They<sup>2,3</sup> further reported that double groove log bearings are commonly utilized particularly if the shaft is supposed to take rotation in both directions. Researchers<sup>4,5</sup> recommended the usage of the circumferential groove in the bearing centre, with the oil supply hole opposite the load bearing region. Groove position<sup>6-8</sup> has a significant influence on the

dynamic properties of many diary bearings lubricated by axial groove liquid.<sup>9</sup> The dynamic output of the rear bearing and pressure distribution is affected by fluid flow regime<sup>10,11</sup> and working condition<sup>12</sup> of the bending. Researchers<sup>13,14</sup> have also worked on the stability analysis of journal bearing used for rocket propulsions.

### Theoretical Model/ Analysis

Current segment explains the theoretical framework designed for the study of dual "groove journal bearing" results. Fundamental geometry of the bearing and two-dimensional unwrapped geometry are shown in Fig. 1.

The degree of positive fluid film pressure is shown by  $\alpha_1$  and  $\alpha_2$  in Fig 1.  $\alpha_{1g}$  and  $\alpha_{2g}$  reflect the middle line position of the grooves.

### Flow Field Equation

The un-dimensional Rey equation that regulates the flowing of lubricating oil in space clearance of the

\*Author for Correspondence

E-mail: manish.saraswat@abes.ac.in

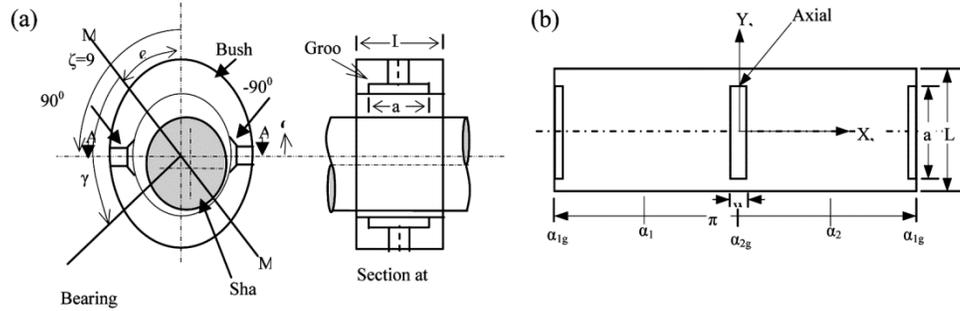


Fig. 1 — (a) basic bearing; (b) unwrapped geometry in two dimensions

“hydrodynamic bearings of journal” that uses the linear theory of turbulence given by Constatantinescu<sup>10</sup> in 1967 as provided in Eq. (1).

$$\frac{\partial}{\partial \alpha} \left[ \frac{\bar{h}^3}{\bar{\mu} \bar{K}_\alpha} \frac{\partial \bar{p}}{\partial \alpha} \right] + \frac{\partial}{\partial \beta} \left[ \frac{\bar{h}^3}{\bar{\mu} \bar{K}_\beta} \frac{\partial \bar{p}}{\partial \beta} \right] = \frac{1}{2} \bar{\Omega} (\bar{X}_j \sin \alpha - \bar{Z}_j \cos \alpha) - (\bar{X}_j \cos \alpha - \bar{Z}_j \sin \alpha) \quad \dots (1)$$

The thickness  $\bar{h}$  of “non dimensional” fluid film for the case of the parallel axes is as mentioned in Eq. (2)

$$\bar{h} = 1 - \bar{X}_j \cos \alpha - \bar{Z}_j \sin \alpha \quad \dots (2)$$

**Approximation for Short Bearings**

Let us suppose that the bearing is made infinitely small keeping the gradient of pressure in the direction of circumference in quite smaller as compared to the “axial direction” such that  $\frac{\partial \bar{p}}{\partial \alpha} \ll \frac{\partial \bar{p}}{\partial \beta}$ .

The resulting Reynolds equation becomes (converges to)

$$\frac{\partial}{\partial \beta} \left[ \frac{\bar{h}^3}{\bar{\mu} \bar{K}_\beta} \frac{\partial \bar{p}}{\partial \beta} \right] = f(\alpha) \quad \dots (3)$$

$$\text{Such that } f(\alpha) = \frac{1}{2} \bar{\Omega} (\bar{X}_j \sin \alpha - \bar{Z}_j \cos \alpha) - \bar{X}_j \cos \alpha - \bar{Z}_j \sin \alpha$$

Eq. (3) has been solved with the help of newly provided conditions of boundary as mentioned in the section below.

**Conditions for Boundary**

The model parameters “boundary conditions” related to the study were provided as

$$(i) \bar{p} = 0 \text{ at } \beta = \pm \frac{L}{D} = \pm \lambda \quad \dots (4)$$

Integrating Eq. (3) with respect to  $\beta$  and using boundary conditions, Eq. (4) pressure distribution around the journal is obtained as

$$\bar{p}(\alpha, \beta) = \left( \frac{\bar{\mu} \bar{K}_\beta}{\bar{h}^3} \right) \left( \frac{1}{2} f(\alpha) (\beta^2 - \lambda^2) \right) \quad \dots (5)$$

After obtaining pressure distribution all negative pressure is made zero. Further, following conditions were also applied.

$$(i) \bar{p} = \bar{p}_s \text{ at } \left[ \left( -\frac{a}{D} < \beta < \frac{a}{D} \right) \text{ and } \left( \alpha_{1g} - \frac{w}{D} < \alpha < \left( \alpha_{1g} + \frac{w}{D} \right) \right) \right] \quad \dots (6a)$$

$$(ii) \bar{p} = \bar{p}_s \text{ at } \left[ \left( -\frac{a}{D} < \beta < \frac{a}{D} \right) \text{ and } \left( \alpha_{2g} - \frac{w}{D} < \alpha < \left( \alpha_{2g} + \frac{w}{D} \right) \right) \right] \quad \dots (6b)$$

where  $\alpha_{1g}$  and  $\alpha_{2g}$  are the center lines of the angular position of grooves in radian

**Load Carrying Capacity**

The load-bearing capability of the bearing is calculated by incorporating the pressure from over positive field of pressure. Load ability in circumference direction determined as

$$\bar{F}_X = - \int_{-\lambda}^{\lambda} \int_0^{2\pi} \bar{p} \cdot \cos \alpha \, d\alpha \, d\beta \quad \dots (7)$$

and similarly load carrying capacity in radial direction (Z) is written as

$$\bar{F}_Z = - \int_{-\lambda}^{\lambda} \int_0^{2\pi} \bar{p} \cdot \sin \alpha \, d\alpha \, d\beta \quad \dots (8)$$

Eqs (7) and (8) are solved numerically using Gauss-Legendre numerical integration in the positive pressure zone

**Computational Procedure**

The equation of the Reynolds, which controls the flow of lubricant in a log-bearing clearance field, is adjusted by adding Turbulence Coefficients as well as the laminar, transformation and turbulent flow tests. A short bearing estimate had been used to overcome Reynolds equation. For the short bearing approximation, the closed form expression for pressure was obtained by combining the Reynolds equation twice and using new boundary conditions. Positive pressure area shall be defined by deletion of pressure below atmospheric (sub-ambient) and 100 kPa supply pressure ( $p_s$ ) is taken

at entire groove area. A computer program with modified boundary conditions was developed.

**Results and Discussion**

Solution and analysis algorithms have been employed to measure the profile for the pressure reaction of the fluid film, its stiffness and the coefficients of damping. Their works have done with the help of taking the aspect bearing ratio (L/D) 0.5 and 0.25. The assumptions that are taken for the bearings and the algorithm for solution have been used to find out the profile for the pressure, reaction of the fluid film and the capacity of loading, coefficient of damping and the stiffness of the fluid film. The aspect ratio of bearing during this experimentation work was kept at 0.25 & 0.5 (L/D). Taking into consideration the bearings and log axes parallel to the radius ratio of the sufficient clearance 0.001 (C/R = 0.001).

**Validation of Results**

The middle level circumferential pressure of the current short bearing approximation was contrasted with Brito *et al.* (2006)<sup>(2)</sup> findings in order to determine the validity of the study, solution algorithms and computer program. The L / D ratio of 0.50, C / R of 0.00294 and 1125 rpm are presented in Fig. 2 for comparison of circumferential pressure with angular direction.

Results well compare any slight unavoidable difference attributable to multiple methodologies for solutions. Following the validation of the solution process, findings are now provided in the following paragraph from the analysis of various groove lengths, location, and super-laminar flow conditions.

**Influence of Location of the Grooves on Pressure Profile**

The hydrodynamic pressure profile at the mid plane of the bearing is shown in Fig 3. The pressure profile is obtained by varying the angular location of

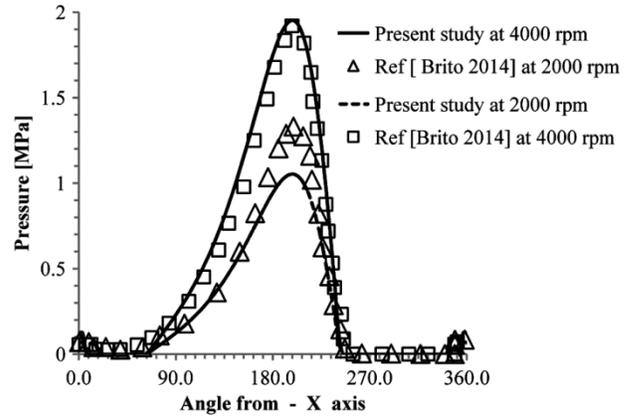


Fig. 2 — Comparison of pressure profile at the mid-plane of the bearing between present analysis with Brito *et al.* (2006)<sup>(2)</sup>

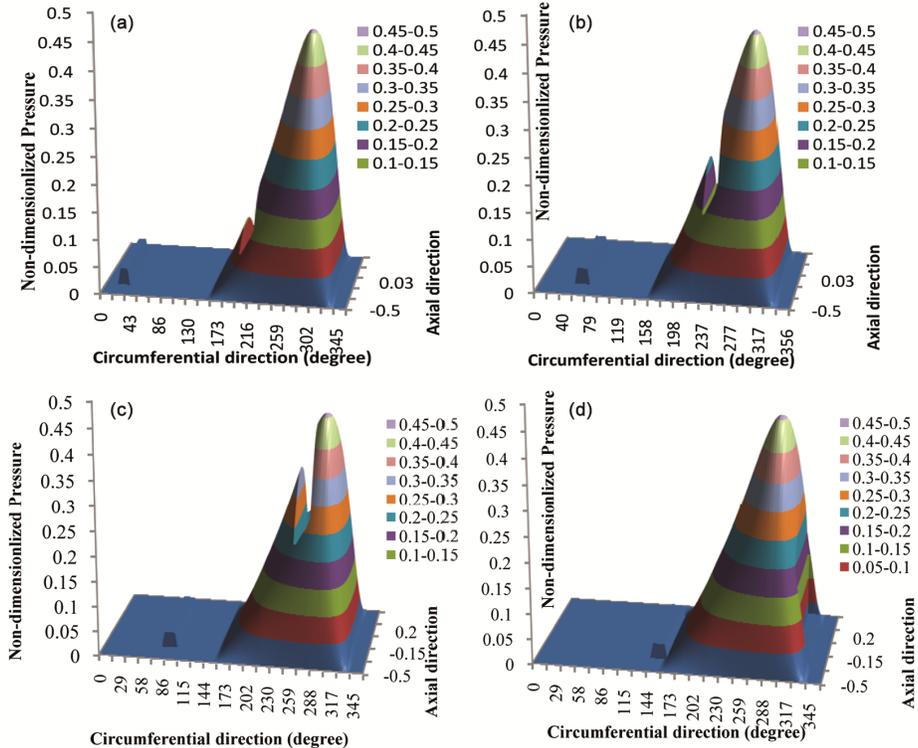


Fig. 3 — Variation of pressure profile for angular position of groove (a)  $\alpha_{1g}=30^\circ$  and  $\alpha_{2g}=210^\circ$ ; (b)  $\alpha_{1g}=60^\circ$  and  $\alpha_{2g}=240^\circ$ ; (c)  $\alpha_{1g}=90^\circ$  and  $\alpha_{2g}=270^\circ$ ; (d)  $\alpha_{1g}=150^\circ$  and  $\alpha_{2g}=330^\circ$

the grooves while length and width ratios are kept constant as  $a/L = 0.6$  and  $w/d = 0.05$ .

Effect of angular location of the grooves on pressure profile is studied on both axial and circumferential directions. It was observed that maximum pressure decreases when location of I<sup>st</sup> groove  $\alpha_{1g}$  changes from  $30^\circ$  to  $90^\circ$  and then starts increasing when it changes from  $90^\circ$  to  $150^\circ$ . Maximum pressure is nearly equal for the location of I<sup>st</sup> groove,  $\alpha_{1g}$  equal to  $30^\circ$  and  $150^\circ$ . These variations are shown in Fig 3, the values of  $\alpha_{1g} = 30^\circ, 60^\circ, 90^\circ$  and  $150^\circ$  respectively and  $\alpha_{2g} = 210^\circ, 240^\circ, 270^\circ$  and  $330^\circ$  respectively.

### Conclusions

A parametric review has been conducted using the statistical / computational model of lubricant supply conditions on non-recessed hybrid rear log bearings. It is concluded that, owing to the high involvement of grooves in the hydrodynamic pressure area, the position of grooves in relation to a load line greatly affects most output parameters. The optimal position of the groove axis was reached at load lines varying from  $60^\circ$  to  $90^\circ$  ( $\alpha_{1g} = 0^\circ$ ).

### References

- Costa L, Miranda A S, Fillon M & Claro J C P, An analysis of the influence of oil supply condition on the thermo-hydrodynamic performance of a single groove journal bearing, *J Engg Tribol*, **217** (2003) 133–144.
- Brito F P, Bouyer J, Fillon M & Miranda A S, Thermal behavior and performance characteristics of a twin axial groove journal bearing as a function of applied load and oil supply temperature, *TRIBOLOGIA-Finnish J Tribol*, **3** (2006) 24–33.
- Brito F P, Miranda A S, Claro J C P & Fillon M, Experimental comparison of the performance of a journal bearing with a single and a twin axial groove configuration, *Tribol Int*, **54** (2012) 1–8.
- Bhagat C & Roy L, Steady state thermo hydrodynamic analysis of two axial groove and multilobe hydrodynamic bearings, *Tribol in Industry*, **36**(4) (2014) 475–487.
- Desai C K & Patel D C, Experimental analysis of pressure distribution of hydrodynamic journal bearing: a parametric study, *Proc Int Conf Adv Mech Engg* (Dhaka University, Bangladesh) 2005, 4–8.
- Dwivedi V K, Chand S & Pandey K N, Stability analysis of twin axial groove hybrid journal bearing, *J Appl fluid Mechanics*, **9** (6), (2016) 2763–2768.
- Kini M V, Pai R S, Rao D S, Shenoy S B & Pai R, Effects of groove location on the dynamic characteristics of multiple axial groove water lubricated journal bearing, *World Academy of Sci Engg and Tech*, **36** (2009) 738–742.
- Roy L & Kakoty S K, Optimum groove location of hydrodynamic journal bearing using genetic algorithm, *Adv in Tribol*, Article ID 580367, (2013).
- Morton P G, Johnson J H & Walton M H, The influence of grooves in bearing on the stability and response of rotating systems, *Tribol Series*, **11** (1987) 347–354.
- Constantinescu V N, The pressure equation for turbulent lubrication, *Proc Inst Mech Eng*, **182** (3A) (1967) 383–400.
- Dwivedi V K, Chand S & Pandey K N, Effects of turbulence on dynamic performance of accelerated/decelerated hydrodynamic journal bearing, *Int J Design Engg*, **5**(3) (2014) 256–288.
- Solghar A, Brito F P, Abdolzadeh M & Frajpour A, Numerical study of twin groove journal bearings performance under steady state condition, *Lub Sci*, **27**(2) (2015) 83–102.
- Navthar R R & Halegowda N V, Stability analysis of hydrodynamic journal bearing using stiffness coefficient, *Int J Engg Sci & Tech*, **2**(2) (2010) 87–93.
- Ren T & Feng M, Stability analysis of water lubricated journal bearing for fuel cell vehicle air compressor, *Tribol Int*, **95** (2016) 342–348.